

Coverking Front Neoprene Seat Cover w/ Height Adjustment & Airbag Provisions, Solid Black (07-15 Wrangler JK 2 Door)



Kit includes driver and passenger seat back cover, seat cover and headrest cover.




Step 1: Remove the head rests from both the passenger and driver side. Slip the head rest covers with the notched side of the cover facing towards the front of the head rest. Attach the Velcro in 3 designed places.





Step 2: Find the passenger side seat back cover. This is the one that has the opening on the left side when looking at the seat back. The opening will face towards the door. Slip it over the passenger seat. Allow the extra fabric to sit on the front seat after pulling the cover on tight.

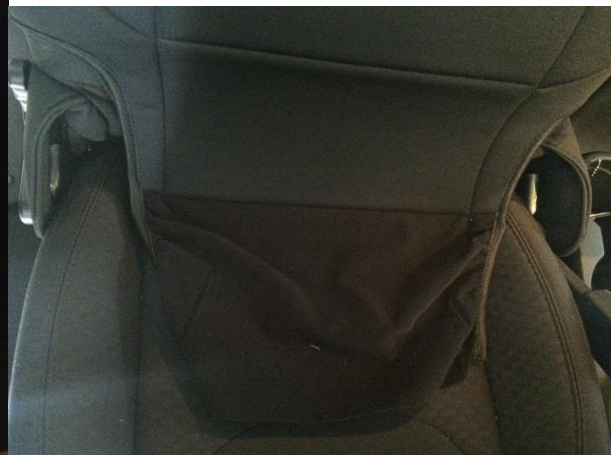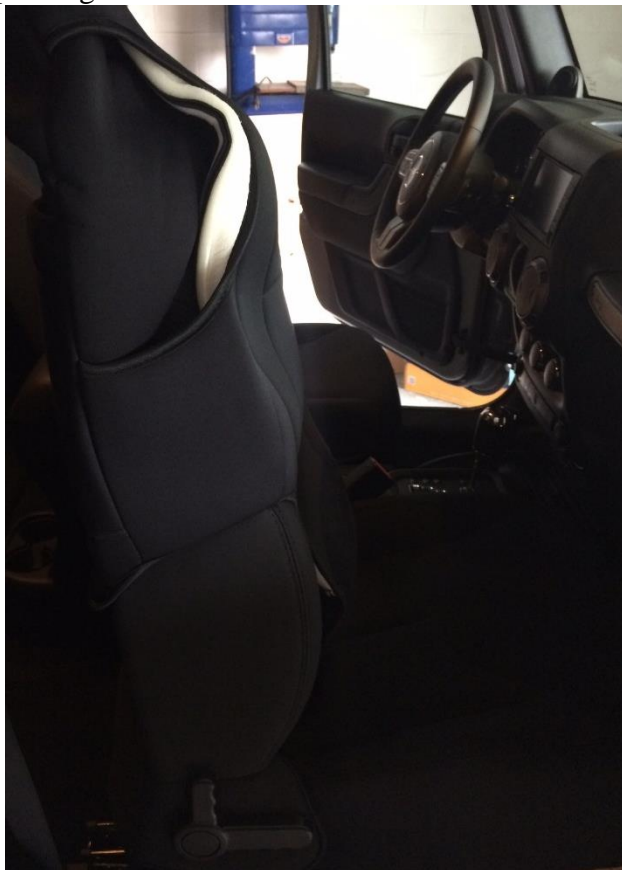

Step 3: Push the bottom of the cover between the seat back and the seat towards the back seats. This is easiest when the seat is tilted all the way forward.

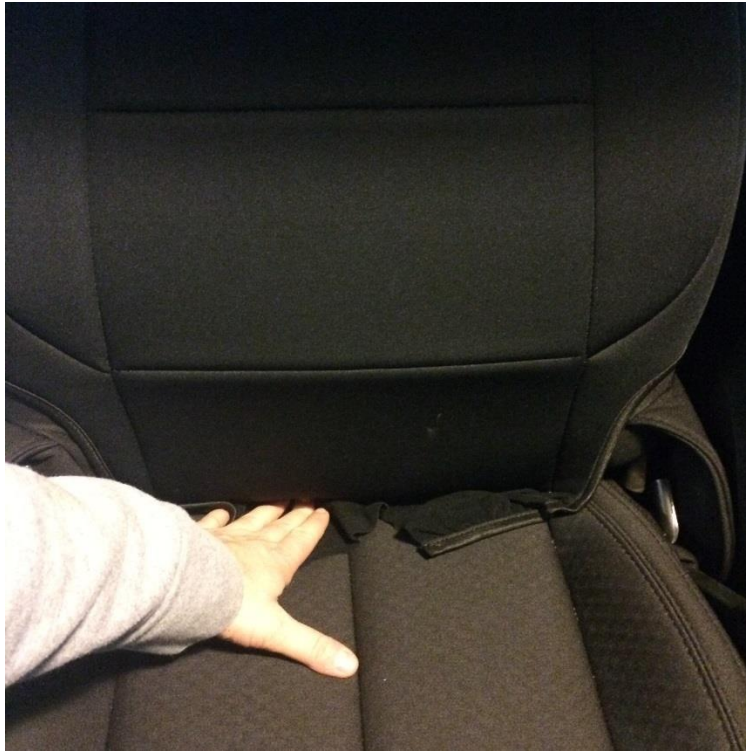

Step 4: The fabric will be scrunched up on the back side of the seat. Pull the fabric completely through until square.

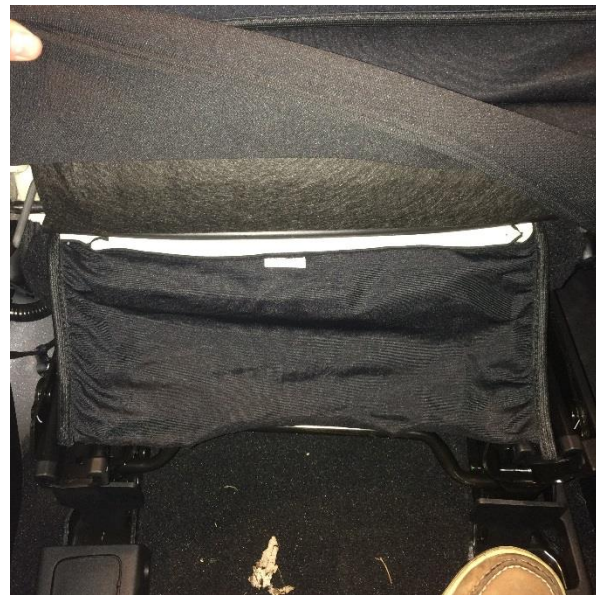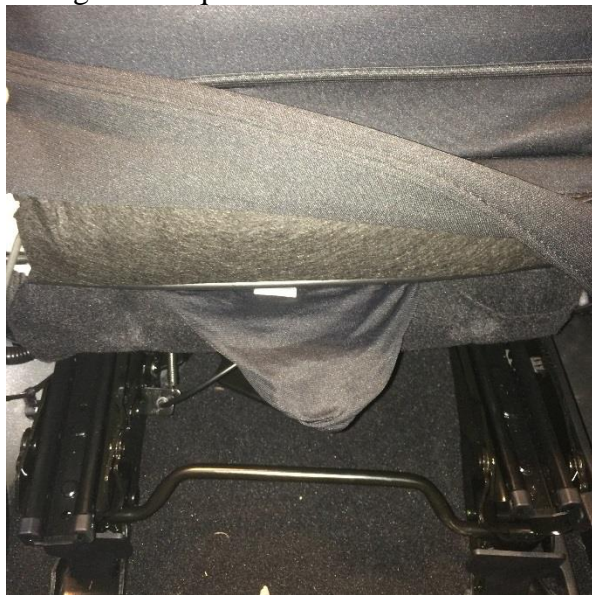

Step 5: Attach the Velcro from the back of the seat cover to the fabric that was just pulled through.




Step 6: Find the passenger side seat cover. This is the one that is notched on the seat belt side. Disconnect the buckles from the bottom side. Place the cover on the seat with the short buckle end near the base of the seat. Push the buckles between the seat towards the rear of the vehicle.



Step 7: Pull the long cord of the buckle towards the front in the footwell.



Step 8: Take these cords and rope them under the seat towards the back seat. They should be fed below the seat slider and above the solid metal bar running across the seat.

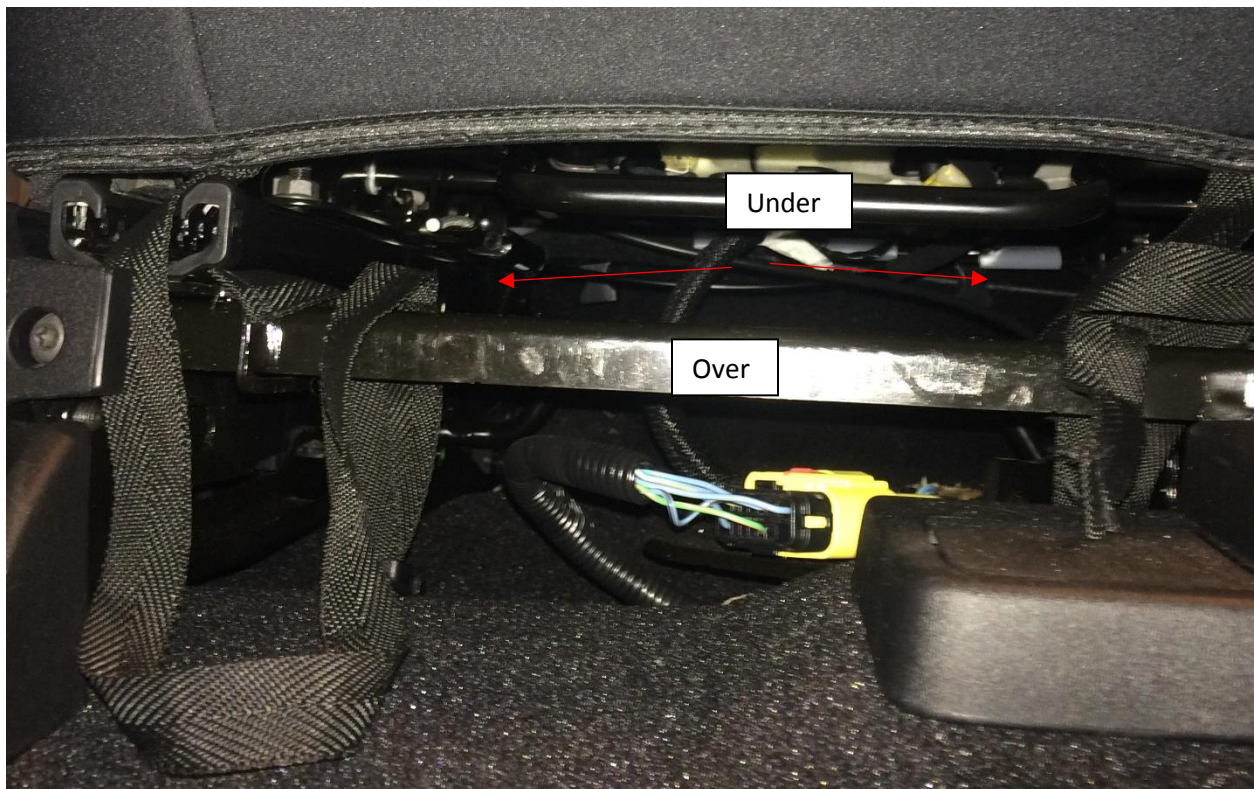

Step 9: From the back seat, pull the cords through to the back. You can see the bar over which the cord should be fed in the background of the picture.




Step 10: Connect the buckles to the respective latch and pull tight. Keep the cables tight to the seat; DO NOT go around the bar seen in the bottom of the picture below.



Step 11: Repeat steps 1-10 for the driver's side with the remaining parts.

Step 12: Enjoy your seat covers!

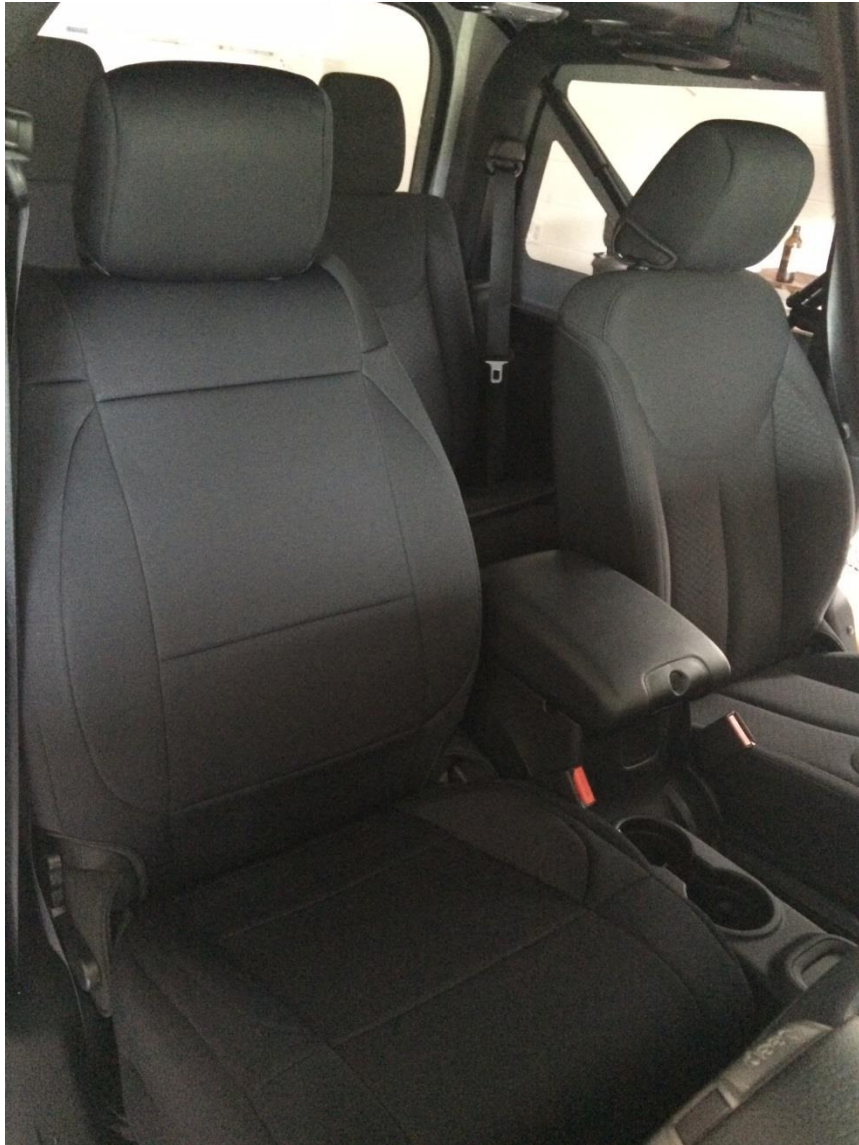

Passenger Side with cover, Driver Side without.